

Office Lighting- Type C Gen2

OSRAM LED Inside

POWER

• 26W • 46W

TECHNICAL SPECIFICATION

eclick Office Lighting

Type Optical Specification

- Color Temperature (CCT)
- Color Rendering Index (CRI)
- Color Code
- Luminous Flux (typ.) (lm)
- Luminous Efficacy (typ.) (lm/W)
- Beam Angle

2 x 2 Feet 2 x 4 Feet

3000 K / 4000 K / 6500 K

> 80

830 / 840 / 865

2900 5100

110

100°

Electrical Specification

- Power Consumption
- Input Voltage
- Input Frequency
- Power Factor
- Maximum AC Input Current
- Protection
- LED Chips

26W 46W

220 / 240 Vac

50 / 60 Hz

> 0.9

< 0.5 A

Short Circuit Protection
Over-Heat Protection

Osram Mid Power LED

Mechanical Specification

- Housing Material
- Housing Finishing
- Diffuser / Reflector Material
- PCB Material
- Operating Temperature
- Operating Humidity
- Ingress Protection
- Dimension
- Weight

Heavy Gauge Cold Rolled Steel Sheet

Glossy White Epoxy Powder Coated

Polycarbonate

Sumitomo LED-Grade CEM-3 PCB

0°C ~ 40°C

20 ~ 90 % RH



IP20

598 x 603 x 30 mm

1198 x 603 x 30 mm

1.4 kg 2.5 kg

PRODUCT DIMENSION

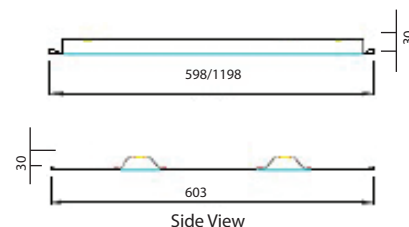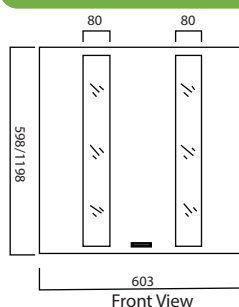

PRODUCT RELIABILITY

Life Span of Product	> 50,000 hrs
Average Lumen Maintenance after 6000 hrs	> 97.3 % Initial Lumen
LED 80% Lumen Maintenance (L80)	> 50,000 hrs



COLOUR OF LIGHT

[3000K]
[4000K]
[6500K]